



# W1111-1 Pro Clima Roof Skillion-Vented Ridge Cap for Normal Ventilation

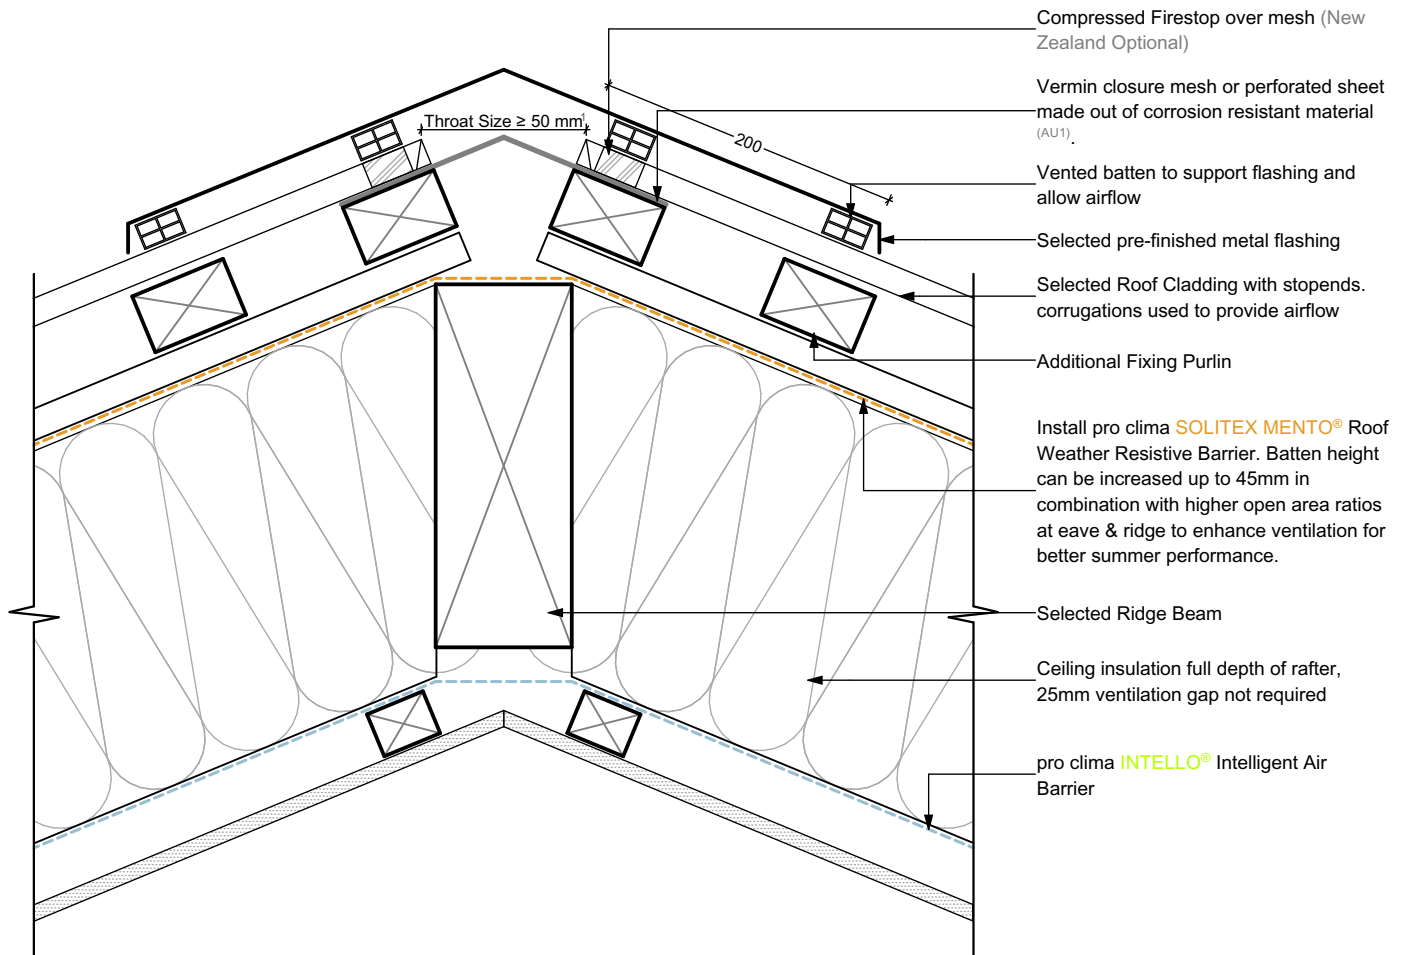

- Compressed Firestop over mesh (New Zealand Optional)
- Vermin closure mesh or perforated sheet made out of corrosion resistant material (AU1)
- Vented batten to support flashing and allow airflow
- Selected pre-finished metal flashing
- Selected Roof Cladding with stopends, corrugations used to provide airflow
- Additional Fixing Purlin
- Install pro clima SOLITEX MENTO® Roof Weather Resistive Barrier. Batten height can be increased up to 45mm in combination with higher open area ratios at eave & ridge to enhance ventilation for better summer performance.
- Selected Ridge Beam
- Ceiling insulation full depth of rafter, 25mm ventilation gap not required
- pro clima INTELLO® Intelligent Air Barrier



**NOTE: Minimum 10° Pitch without rigid sheathing board**

**NOTES:**

1: For a throat size of 50 mm a mesh of at least 10% free open area must be selected to achieve normal ventilation.

(Australia Only)

1: Cavity Closer must meet AS 3959 requirements for bushfire protection up to BAL 40 can be achieved by fitting an ember guard made of non-combustible material or a mesh or perforated sheet with ≤ 2 mm holes and made of corrosion resistant steel or bronze.



**Title:Roof Skillion-Vented Ridge Cap for Normal Ventilation**

Description: Skillion , 20x45 counter batten, Normal Ventilation, 50cm2/m vented ridge cap over cladding corrugations.

ID: W1111-1    Issued: 25/05/2020    Revision: D

© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline only and subject to change without notice. Thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®. Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.